



Undercounter ice maker up to 47 kg - Paddle system

Hotel	████████████████████
Restaurant	████████████████████
Fast food	████████████████████
Bar	████████████████████
Disco	████████████████████
Fish market	████████████████████
Supermarket	████████████████████
Medical & SPA	████████████████████
Industry	████████████████████

► Position n°



► Features & Plus

- Hollow cube
- AISI 304 SS Scotch Brite finish 
- Tropical class +43°C 
- Adjustable Stainless Steel feet
- Removable and cleanable air filter
- Air or water cooling system
- Easy cleanable internal rounded surfaces 
- HCFC-Free insulated storage 
- FDA approved -ABS water basin 
- Basin tipping safety system
- RoHS Free 
- Disappearing insulated door 
- Electromechanical operation
- ON-OFF rocker switch 
- Automatic water charge
- Standard voltages
- HFC free 



AISI 304 SS Scotch Brite finish



Removable and cleanable air filter




FDA approved - ABS water basin



Disappearing insulated door

► Available ice cube size



► Prod. 24h

Air temp.	Water temp.		kg	lb
	10° C	50° F		
10° C	50° F	7° C	47	104
21° C	70° F	15° C	38	84

2 Years Warranty
subject to limitations

► Certifications available for this model






Ice Finger

IMF 35 HC



Undercounter ice maker up to 47 kg - Paddle system

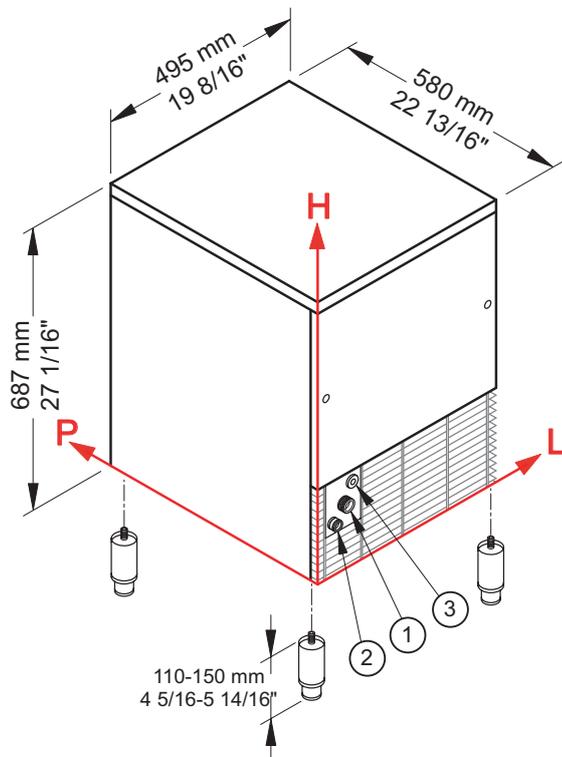

► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

	Water temperature						
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	47 kg					
	50° F		104 lb				
	21° C			38 kg			
	70° F				84 lb		
	32° C					33 kg	
	90° F						73 lb

► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 111 mm / 4 6/16" - 196 mm / 7 11/16" - 3/4" ② Water out.: 49 mm / 1 15/16" - 151 mm / 5 15/16" - 24 mm / 15/16"
- ③ Electrical connections: 156 mm / 6 2/16" - 232 mm / 9 2/16"

► Technical information

Production in 24h **38 kg / 84 lb**

Store capacity, up to **15 kg / 33 lb**

Cooling system **A - W**

Kind of cube **A-20g**

Refrigerant **R290**

Standard voltage **220-240 V ~ 50 Hz**

Average power consumption **275 W**

Fuse **10 A**

Electrical consumption **17 kWh/100kg**

Water consumption

A: 3 l/kg - 36 gal/100 lb

W: 14 l/kg - 168 gal/100 lb

Sizes (L-P-H mm)

495 - 580 - 687

(L-P-H in)

19 8/16 - 22 13/16 - 27 1/16

Sizes with pack (L-P-H mm)

550 - 630 - 880

(L-P-H in)

21 10/16 - 24 13/16 - 34 10/16

Net weight

47 kg / 104 lb

Gross weight

55 kg / 121 lb

Finish

AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

Sizes without feet

Standard Cube (20 g)

Ambient temperature +21° C

Water temperature +15° C

Electrical consumption at +32° C (standard voltage)

Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice



Klik hier voor meer informatie op vonmarcken.nl



Bim + Data
download

