Klik hier voor meer informatie op vonmarcken.nl

PRODUCT

-60°C LOW TEMP. FREEZERS

The VT low temperature freezers provides the possibility to maintain temperatures as low as -60°C. Supreme stability, reliability, user-friendliness and ease of cleaning makes the VT LT freezers an ideal solution for laboratories and hospitals.

Nature R refrigerant, cyclopentane insulation combined with recyclable materials, ensures that the freezers are extremely eco-friendly.

SPECIFICATIONS

Gross volume, litres (cu. ft.)	383 (13.5)
Internal storage capacity, litres (cu. ft.)	368 (13.0)
Temperature range (16°C-30°C AMB)	-30°C to -60°C
Temperature probes	1
Compressor	Embraco
Refrigerant	Nature R
Noise level, dB	55
Power consumption, kWh / 24h	7,7
Power consumption, kWh / year	2.811
Voltage, V	220-240
Frequency, Hz	50



FEATURES

Castors	YES
No. of baskets	4
Defrost	Manual
Battery Backup	NO
USB	NO
Alarm connection	NO/NC
Digital controller	XR30CX
Data logging, # logs	NO
Analogue chart recorder	NO
Max no. of standard vials, pcs.	22.842

DIMENSIONS

Height, mm (inches)	850 (33.5)
Height w. castors, mm (inches)	890 (35.1)
Width, mm (inches)	1.560 (61.4)
Depth, mm (inches)	695 (27.4)
Gross weight, kg (lbs)	95 (209)
Net weight, kg (lbs)	88 (194)

LOADING QUANTITIES

Qty. per 20' / 40' container	20 / 40
Qty. per truck (EU standard)	54



Products are subject to change due to enhancements and continuous development. Vestfrost Solutions reserve the right to alter any information, without further notice.



A/S Vestfrost Falkevej 12 DK-6705 Esbjerg Ø www.vestfrostsolutions.com

DETAILS

- State-of-the-art unit designed and manufactured by A/S Vestfrost in Denmark
- Unit optimized for optimal footprint

ENVIRONMENT

- · Eco-friendly, HCFC-free Nature R refrigerant
- · Efficient cyclopentane insulation
- · Low energy consumption

FEATURES

- Digital XR30CX controller with display
- · Prepared for external logging equipment
- PT1000 internal temperature measuring probe
- · Top-quality castors for explicit movability
- · Integrated lock to prevent unauthorized access
- High/low temperature alarm

QUALITY

- · User-friendly and maintenance-free
- · Single compressor system
- · Suitable for rack systems
- · ISO 9001, 14001 & 18001 OHSAS Certified



-60°C LOW TEMP. FREEZERS

VT 407

SAFETY first, and therefore the VT units are all equipped with integrated locks, and alarms.



PRECISION digital XR30CX controller with display, which is preprogrammed from factory.



 $\ensuremath{\text{TOP-QUALITY}}$ castors eases repositioning of the VT line units (Optional on some VT units).



Products are subject to change due to enhancements and continuous development. Vestfrost Solutions reserve the right to alter any information, without further notice.




BIOMEDICAL SOLUTIONS

A/S Vestfrost Falkevej 12 DK-6705 Esbjerg Ø www.vestfrostsolutions.com

DIMENSIONS

-60°C LOW TEMP. FREEZER

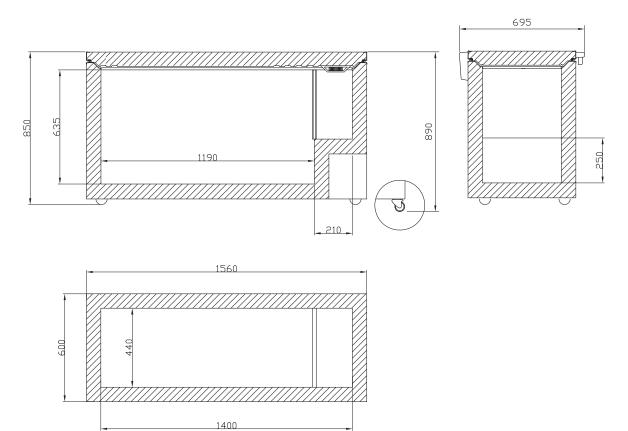

DIMENSIONS

Height, mm (inches)	850 (33,46)
Height w. castors, mm (inches)	890 (35,04)
Width, mm (inches)	1.560 (61,42)
Depth, mm (inches)	600 (23,62)
Gross weight, kg (lbs)	94 (207)

Products are subject to change due to enhancements and continuous development. Vestfrost Solutions reserve the right to alter any information, without further notice.

All measurements in mm

A/S Vestfrost Falkevej 12 DK-6705 Esbjerg Ø www.vestfrostsolutions.com

DIMENSIONS

-60°C LOW TEMP. FREEZER



INTERNAL DIMENSIONS

Height, mm (inches)	635 (25)
Width, mm (inches)	1.400 (55,12)
Depth, mm (inches)	440 (17,32)
Insulation, mm	80
Insulation type	PUR
Innerliner material	Coated steel
Max. AMB humidity, %	70
Internal humidity, %	<5

LOADING CAPACITY

Max loading, kg (lbs)	200 (440)
Max no. of standard vials, pcs.	22.842
Max loading in baskets, kg (lbs)	201 (443)

UNIT FEATURES


Porthole for external probe, mm $\ensuremath{\mathcal{Q}}$	12
Castors (with brakes)	4 (0)
Inner lids	0
Lid vacuum release	N/A

BASKET FEATURES

Basket material	Coated steel
Basket type	Medium
Quantity	4
Maximum basket load, kg (lbs)	14,50 (31,96)
Weight, kg (lbs)	0,390 (0,86)



A/S Vestfrost Falkevej 12 DK-6705 Esbjerg Ø www.vestfrostsolutions.com



Products are subject to change due to enhancements and continuous development. Vestfrost Solutions reserve the right to alter any information, without further notice.

RACKS

-60°C LOW TEMP. FREEZERS

STORAGE CAPACITY: RACKS FOR 50 MM BOXES

VF Product no.	No. of boxes	No. of racks	Total no. of boxes	
VF311200	6	3	18	
VF311220	11	24	264	
Total, ex dividers			282	A A A A A A A A A A A A A A A A A A A

STORAGE CAPACITY: RACKS FOR 50 MM BOXES (INCL. DIVIDERS)

VF Product no.	No. of boxes	No. of racks	Total no. of boxes
VF312200	6	3	18
VF312220	11	24	264
Total, vials			22.842

STORAGE CAPACITY: RACKS FOR 75 MM BOXES

VF Product no.	No. of boxes	No. of racks	Total no. of boxes	at the two
VF311300	4	3	12	
VF311320	8	24	192	
Total, ex dividers			204	

STORAGE CAPACITY: RACKS FOR 75 MM BOXES (INCL. DIVIDERS)

VF Product no.	No. of boxes	No. of racks	Total no. of boxes
VF312300	4	3	12
VF312320	8	24	192
Total, vials			16.524

STORAGE CAPACITY: RACKS FOR 100 MM BOXES

Total, ex dividers			129	
VF311420	5	24	120	
VF311400	3	3	9	
VF Product no.	No. of boxes	No. of racks	Total no. of boxes	



STORAGE CAPACITY: RACKS FOR 100 MM BOXES (INCL. DIVIDERS)

VF312400	3	3	9
VF312420		24	120
Total, vials			129





A/S Vestfrost Falkevej 12 DK-6705 Esbjerg Ø www.vestfrostsolutions.com

SOLUTIONS

VESTFR#ST