

Klik hier voor meer informatie op vonmarcken.nl

PRODUCT

VT 408

-86°C ULTRA LOW TEMP. FREEZERS

The VT ultra low temperature freezers provides the possibility to maintain temperatures as low as -86°C. Supreme stability, reliability, user-friendliness and ease of cleaning makes the VT ULT freezers an ideal solution for laboratories and hospitals.

Nature R refrigerant, cyclopentane insulation combined with recyclable materials, ensures that the freezers are extremely eco-friendly.

SPECIFICATIONS

Gross volume, litres (cu. ft.)	383 (13.5)
Internal storage capacity, litres (cu. ft.)	368 (13.0)
Temperature range (16°C-30°C AMB)	-60°C to -86°C
Temperature probes	1
Compressor	Embraco
Refrigerant	Nature-R
Noise level, dB	55
Power consumption, kWh / 24h	8,10
Power consumption, kWh / year	2.957
Voltage, V	220
Frequency, Hz	50



FEATURES

Castors	YES
Inner lids	4
Defrost	Manual
Battery Backup	50h
USB	NO
Alarm connection	NO/NC
Digital controller	XR30CX
Data logging, # logs	NO
Analogue chart recorder	NO
Max no. of standard vials, pcs.	22.842

DIMENSIONS

Height, mm (inches)	850 (33.5)
Height w. castors, mm (inches)	890 (35.1)
Width, mm (inches)	1.560 (61.4)
Depth, mm (inches)	695 (27.4)
Gross weight, kg (lbs)	95 (209)
Net weight, kg (lbs)	88 (194)

LOADING QUANTITIES

Oty. per 20' / 40' container	20 / 40
Qty. per truck (EU standard)	54







DETAILS

VT 408

-86°C ULTRA LOW TEMP. FREEZERS

- State-of-the-art unit designed and manufactured by A/S Vestfrost in Denmark
- · Unit optimized for optimal footprint

ENVIRONMENT

- · Eco-friendly, HCFC-free Nature R refrigerant
- · Efficient cyclopentane insulation
- · Low energy consumption

FEATURES

- · Digital XR30CX controller with display
- · Approximately 50 hours battery backup
- · Prepared for external logging equipment
- · PT1000 internal temperature measuring probe
- · Top-quality castors for explicit movability
- · Integrated lock to prevent unauthorized access
- · High/low temperature alarm

QUALITY

- · User-friendly and a minimum of maintenance
- · Single compressor system
- · Suitable for rack systems
- · ISO 9001, 14001 & 18001 OHSAS Certified
















DIMENSIONS VT 408 -86°C ULTRA LOW TEMP. FREEZER

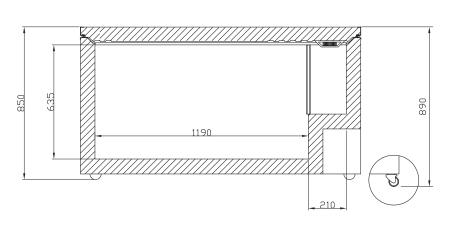



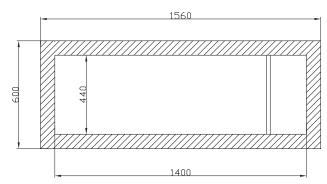

DIMENSIONS

Height, mm (inches)	850 (33,46)
Height w. castors, mm (inches)	890 (35,04)
Width, mm (inches)	1.560 (61,42)
Depth, mm (inches)	695 (27,40)
Gross weight, kg (lbs)	95 (209)

All measurements in mm







DIMENSIONS VT 408 -86°C ULTRA LOW TEMP. FREEZER



INTERNAL DIMENSIONS

Height, mm (inches)	635 (25)
Width, mm (inches)	1.400 (55,12)
Depth, mm (inches)	440 (17,32)
Insulation, mm	80
Insulation type	PUR
Innerliner material	Galv. steel
Max. AMB humidity, %	70
Internal humidity, %	<5

LOADING CAPACITY

Max loading, kg (lbs)	200 (440)
Max no. of standard vials, pcs.	22.842
Max loading in baskets, kg (lbs)	112 (247)

UNIT FEATURES

Porthole for external probe, mm Ø	12
Castors (with brakes)	4 (0)
Inner lids	4
Lid vacuum release	N/A

BASKET FEATURES [OPTIONAL]

Basket material	Coated steel
Basket type	Medium
Quantity	0
Maximum basket load, kg (lbs)	14,50 (31,96)
Weight, kg (lbs)	0,390 (0,86)





